


R.I. Colonia Güell, edif. Filatures 2º 1ª
08690 Santa Coloma de Cervelló,
Barcelona

tel 902 30 40 30
fax 936 30 46 43
info@arcotechnologies.com
www.arcotechnologies.com

Empresa Certificada




RESINS AND MORTARS

# at limpiador polispray

## liquid cleaner for uncured polyurethane foam

- Cleaning uncured polyurethane foam remains
- Clean polyurethane foam application gun inside
- Cleaning of small traces of polyurethane putty





# at limpiador polispray

liquid cleaner for uncured polyurethane foam

## PROPERTIES

AT LIMPIADOR POLISPRAY B2 eliminates polyurethane foam into the spray gun and other surfaces while still fresh.

## USE CAUTIONS

| | |
|---|---|
| R-12 | EXTREMELY FLAMMABLE. |
| R-36 | IRRITATING TO EYES. |
| R-66 | REPEATED EXPOSURE MAY CAUSE SKIN DRYNESS OR CRACKING SKIN. |
| R-67 | VAPOURS MAY CAUSE DROWSINESS AND DIZZINESS. |
| S-23.4 | DO NOT BREATHE SPRAY. |
| S-51 | USE ONLY IN WELL VENTILATED AREAS. |
| S-26 | IN CASE OF CONTACT WITH EYES, RINSE IMMEDIATELY WITH PLENTY OF WATER AND CALL THE DOCTOR. |
| S-56 | DISPOSE OF THE PRODUCT AND ITS CONTAINER AT HAZARDOUS OR SPECIAL WASTE. |



1



2

## HOW TO USE

1 Screw the gun on AT LIMPIADOR POLISPRAY B2.
2 Press repeatedly the trigger to remove debris from the inside parts of the spray gun until you have exited all foam.
3 Also use AT LIMPIADOR POLISPRAY B2, with the special valve provided in the package, to remove the excess foam outside of the gun, do not use any other product as spray gun cleaner.



With AT LIMPIADOR POLISPRAY B2 also fresh polyurethane foam stains can be removed.

3





**Xi - Irritating**



**F - Flammable**






R.I. Colonia Güell, edif. Filatures 2º 1ª
08690 Santa Coloma de Cervelló,
Barcelona

tel 902 30 40 30
fax 936 30 46 43
info@arcotechnologies.com
www.arcotechnologies.com

Empresa Certificada







Miembro Oficial
Asociación Española
de Impermeabilizantes





RESINAS Y MORTEROS

# at limpiador polispray B2

## limpiador líquido de espuma de poliuretano no endurecida

- Limpieza de restos de espuma de poliuretano no endurecida
- Limpieza interior de pistola aplicadora de espuma de poliuretano
- Limpieza de pequeños restos de masilla de poliuretano

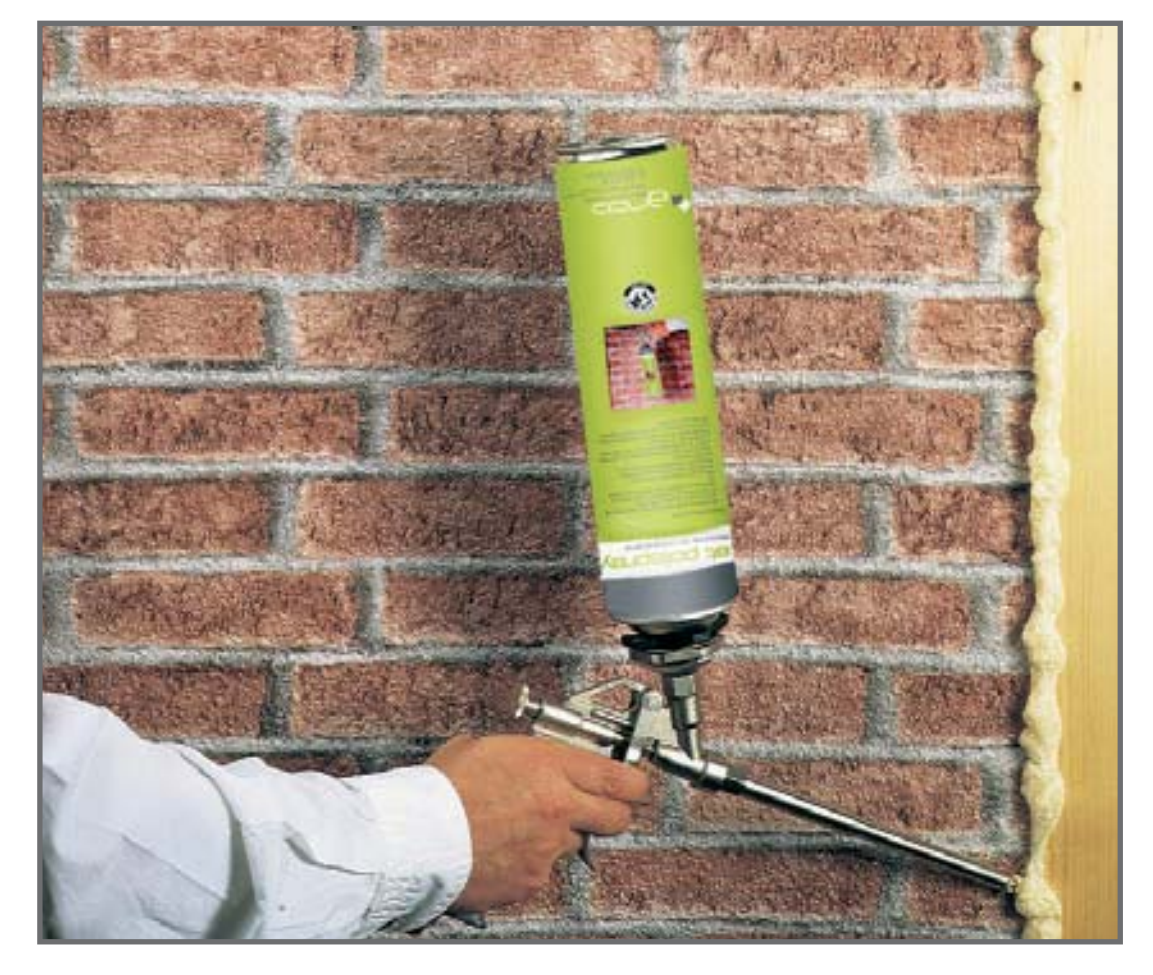



# at limpiador polispray B2

limpiador líquido de espuma de poliuretano no endurecida

## PROPIEDADES

AT LIMPIADOR POLISPRAY B2 elimina la espuma de poliuretano de la pistola aplicadora y de cualquier otro soporte mientras todavía no se haya secado.

## PRECAUCIONES DE USO

| | |
|---|---|
| R-12 | RXTREMADAMENTE INFLAMABLE. |
| R-36 | IRRITA LOS OJOS. |
| R-66 | LA EXPOSICIÓN REPETIDA PUEDE PROVOCAR SEQUEDAD O FORMACIÓN DE GRIETAS EN LA PIEL . |
| R-67 | LA INHALACIÓN DE VAPORES PUEDE PROVOCAR SOMNOLENCIA Y VÉRTIGO. |
| S-23.4 | NO RESPIRAR LOS AEROSOLES. |
| S-51 | ÚSESE ÚNICAMENTE EN LUGARES BIEN VENTILADOS. |
| S-26 | EN CASO DE CONTAGIO CON LOS OJOS, LÁVENSE INMEDIATAMENTE Y ABUNDANTEMENTE CON AGUA Y ACUDIR AL MÉDICO. |
| S-56 | ELIMÍNESE LA SUSTANCIA Y SU RECIPIENTE EN UN PUNTO DE RESIDUO ESPECIAL O PELIGROSO. |



1



2

## MODO DE EMPLEO

1. Enroscar la pistola sobre AT LIMPIADOR POLISPRAY B2.
2. Presionar repetidas veces el gatillo para eliminar los restos del interior de la pistola aplicadora hasta que haya salido toda la espuma.
3. Emplear asimismo AT LIMPIADOR POLISPRAY B2, con la válvula especial incluida en el envase, para eliminar la espuma sobrante del exterior de la pistola, no emplear ningún otro producto limpiador para la pistola aplicadora.



Con AT LIMPIADOR POLISPRAY B2 también podrán eliminarse manchas frescas de espuma de poliuretano.

3







Xi - Irritante



F - Inflamable

